




Product Description:

- ◆ Impeccable design with clear-cut dimension and artistry.
- ◆ Vertical mounting rails with complete dexterity;
- ◆ Pivoting wheels and legs can be installed together to withstand a maximum static load of 150kg;
- ◆ Top & bottom wiring holes can be fastened, size of bottom large hole can be modified;


Product Information :

- ◆ Fulfills the ANS/EIARS-310-D, IEC297-2, DIN41491, PART1, DIN41491, PART7, ETSI Standard ;
- ◆ Material : SPCC quality cold rolled steel ;
- ◆ Thickness : Mounting profile 1.8mm ; others 1.2mm ;
- ◆ Tempered glass; Thickness: 5mm
- ◆ Loading Magnitude : Static loading: 1500kg (on the adjustable feet)
- ◆ Degree of safeguard : IP20
- ◆ Surface finish: Degrease, acid pickling, rust prevention and Parkerizing, pure water cleaning, static electricity plastic painting.
- ◆ Product specification : 4U-15U
Width : 600mm Depth :
450mm, 600mm:
- ◆ Body Color: RAL9004, RAL7035

Breakdown View

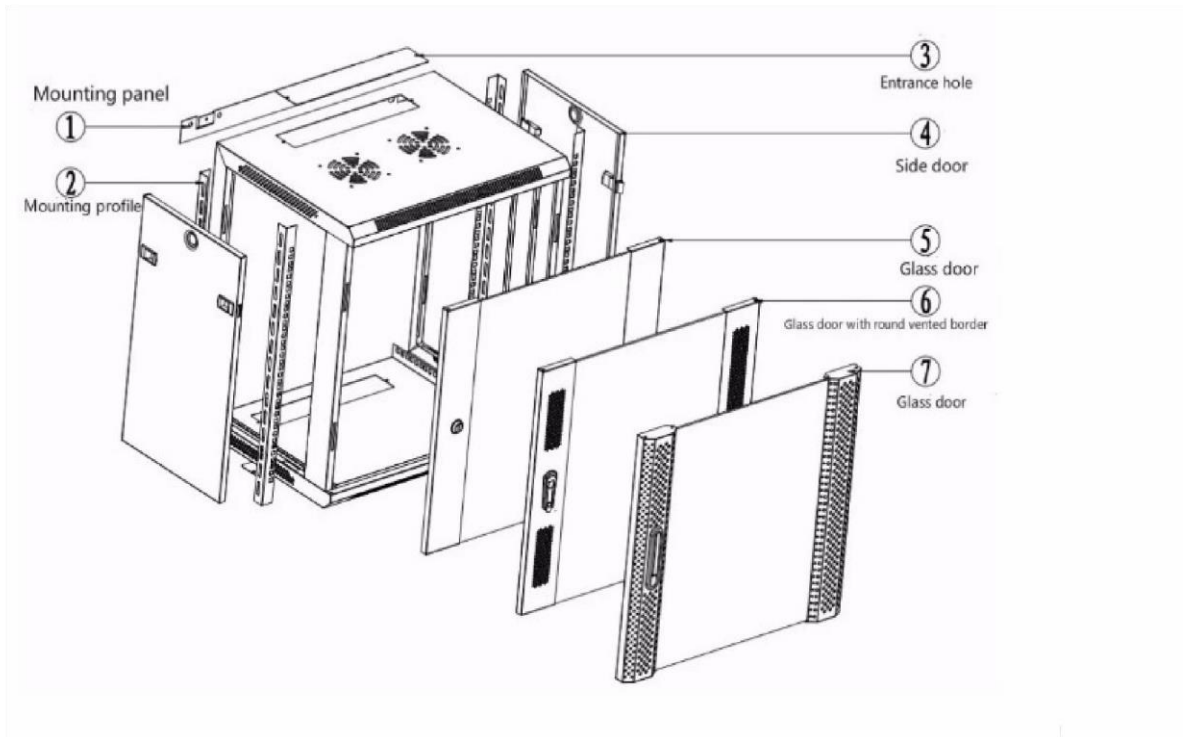

Main dimension

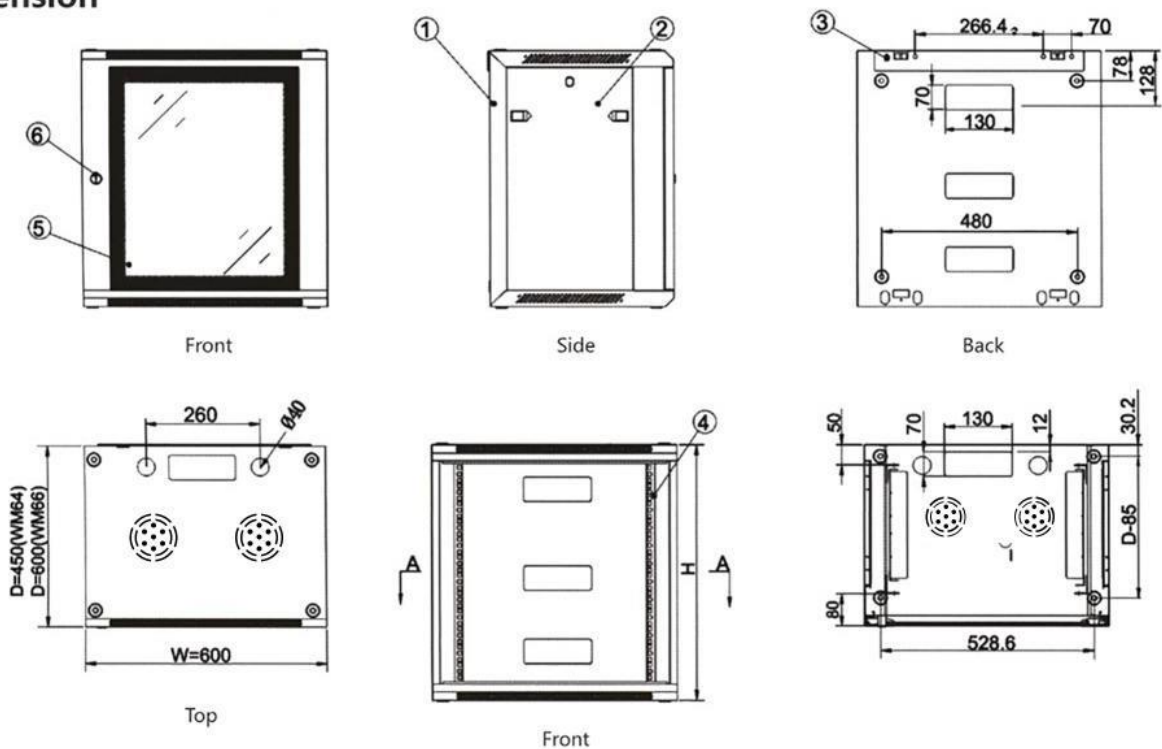

Specification

Item No	U Capacity	Size(mm)			Packaging size(mm)	Volume(CBM)
		W	D	H		
DHR-0464	4U	600	450	240	620*470*255	0.073
DHR-0466		600	600	240	620*620*255	0.096
DHR-0664	6U	600	450	330	620*470*345	0.099
DHR-0666		600	600	330	620*620*345	0.13
DHR-0964	9U	600	450	462	620*620*475	0.136
DHR-0966		600	600	462	620*620*475	0.18
DHR-1264	12U	600	450	600	620*470*615	0.176
DHR-1266		600	600	600	620*620*615	0.233
DHR-1564	15U	600	450	730	620*470*745	0.213
DHR-1566		600	600	730	620*620*745	0.282