



© EBELCO COPYRIGHT 2019.


600-LED

FEATURES :

- Dual Voltage Selectable (12 VDC / 24 VDC)
- Low Current Consumption
- Reliable Holding Force
- Hall Effect Sensor Monitoring Output
- Green/Red LED Indication for EM Lock Status
- Durable & Silence Operation
- Cosmeticize Anodized Aluminum Casing
- Surge & Spike Protection PCB
- Anti-Tamper Jam Nuts
- Full Range of Optional Brackets
- Anti Residual Magnetism Kick Off Button


SPECIFICATIONS :

- 1 **Voltage Input :** 12 VDC / 24 VDC
- 2 **Current Draw :** 12V / 510mA ; 24V / 285mA ($\pm 5\%$)
- 3 **Holding Force :** Up to 600 lbs (272 kg)
- 4 **Hall Effect Contact :** SPDT rated 1A at 24 VDC
- 5 **Anti-Rust Surface Treatment :** Blue Zinc Plating
- 6 **Operating Temperature :** 0~55° C (32~131° F)
- 7 **Operating Humidity :** 0~95% (non condensing)
- 8 **Weight :** 1.90 kg ($\pm 1\%$)
- 9 **Dimensions :** Magnet - (L)250x(W)42x(T)25 mm
Armature - (L)180x(W)38x(T)11 mm

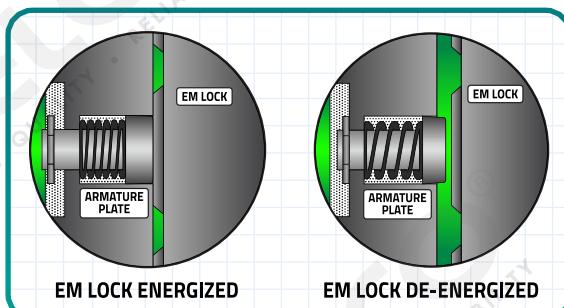

Ebelco electromagnetic lock 600 series are known with its excellent holding force and remarkable features.

The series compliance to **UL**, **CE** and **PSB Test** are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with the maximum quality and reliability.

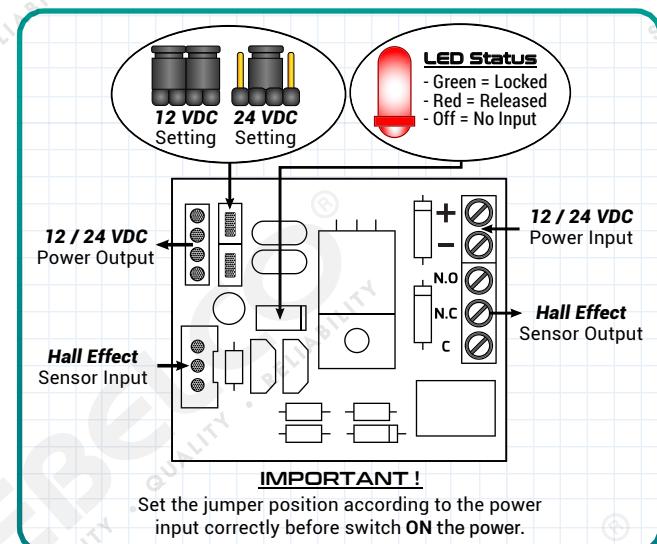

*Disclaimer :

Ebelco reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

CE **c** **RoHS**



SECURITY . QUALITY . RELIABILITY

Ebelco Industries SDN. BHD. 474704-V

16, Jalan TTC 26, Taman Teknologi Cheng,
75250, Melaka, Malaysia.

Phone : [+606] 333 8855 Fax : [+606] 333 8822

Website : www.ebelco.com Email : enquiry@ebelco.com

WWW.EBELCO.COM