



© EBELCO COPYRIGHT 2019.

MORTICE 600

FEATURES :

- ✓ Dual Voltage Selectable (12VDC / 24VDC)
- ✓ Low Current Consumption
- ✓ Reliable Holding Force
- ✓ Durable & Silence Operation
- ✓ Cosmeticize Anodized Aluminum Casing
- ✓ Surge & Spike Protection PCB
- ✓ Full Range of Optional Brackets
- ✓ Anti Residual Magnetism Kick Off Button


SPECIFICATIONS :

- 1 Voltage Input : 12 VDC / 24 VDC
- 2 Current Draw : 12V / 480mA ; 24V / 240mA (±5%)
- 3 Holding Force : Up to 600 lbs (272 kg)
- 4 Anti-Rust Surface Treatment : Blue Zinc Plating
- 5 Operating Temperature : 0~55° C (32~131° F)
- 6 Operating Humidity : 0~95% (non condensing)
- 7 Weight : 1.90 kg (±1%)
- 8 Dimensions : Magnet - (L)228x(W)38x(T)27 mm
Armature - (L)180x(W)38x(T)11 mm


EBELCO 600 series electromagnetic locks are known with its excellent holding force and the remarkable features.

The series is compliance to CE and are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with the maximum quality and reliability.

MORTICE LOCK C/W WIRING CONNECTION

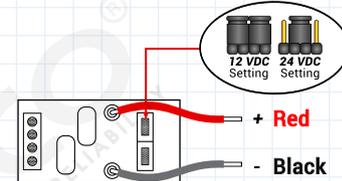

MORTICE LOCK C/W PCB CONNECTION

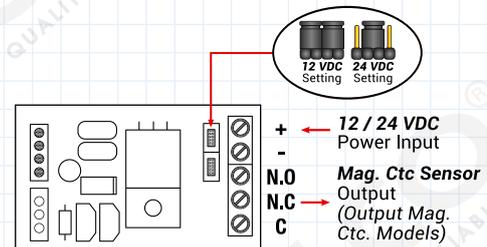

IMPORTANT !

Set the jumper position according to the power input correctly before switch ON the power.

*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

