



© EBELCO COPYRIGHT 2019.

DH-1224

FEATURES :


- ✓ Dual Voltage Selectable (12 VDC / 24 VDC)
- ✓ Emergency Release Button / Test Button
- ✓ Low Current Consumption
- ✓ Reliable Fail-Safe Mechanism
- ✓ Durable & Silence Operation
- ✓ Cosmetic Powder Coat Casing
- ✓ Compact Size For Most Type Of Swing Doors
- ✓ Full Range Of Optional Brackets
- ✓ Anti-Residual Magnetism Kick Off Button

SPECIFICATIONS :

- 1 Voltage Input : 12 VDC / 24 VDC
- 2 Current Draw : 12V / 100mA ; 24V / 50mA (±5%)
- 3 Holding Force : Up to 150 lbs (70kg)
- 4 Anti-Rust Surface Treatment : Blue Zinc Plating
- 5 Operating Temperature : 0~55°C (32~131°F)
- 6 Operating Humidity : 0~95% (non condensing)
- 7 Weight : 0.7kg (±1%)
- 8 Dimensions : Magnet - (H)85x(W)70(T)40 mm
Armature - (Φ)55x(T)8 mm

EBELCO electromagnetic *Door Holder* are known with its excellent reliability in fail-safe operation and the remarkable features.

The series compliance to CE and are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with the maximum quality and reliability.

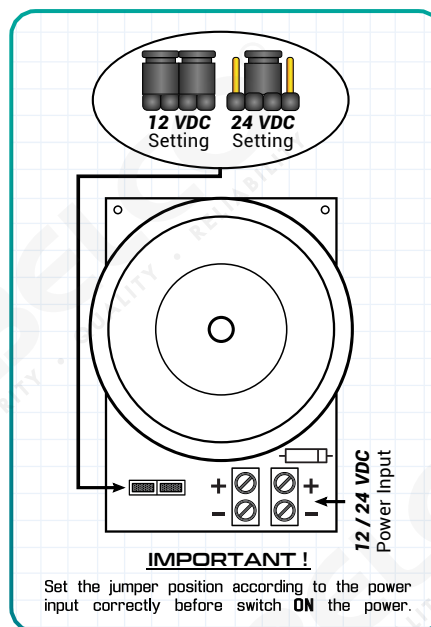

*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

