



© EBELCO COPYRIGHT 2019.


DH-2448L-220

FEATURES :

- Dual Voltage Selectable (12 VDC or 24 VDC)
- Emergency Release Button / Test Button
- Floor & Wall Mounting Direction
- Low Current Consumption
- Reliable Fail-Safe Mechanism
- Durable & Silence Operation
- Cosmetic Powder Coat Casing
- Compact Size for Most Type of Swing Doors
- Anti-Residual Magnetism Kick Off Button


SPECIFICATIONS :

- 1 **Voltage Input :** 28 VDC / 48 VDC
- 2 **Current Draw :** 24V / 100mA ; 48V / 50mA ($\pm 5\%$)
- 3 **Holding Force :** Up to 110 lbs (50kg)
- 4 **Anti-Rust Surface Treatment :** Blue Zinc Plating
- 5 **Operating Temperature :** 0~55°C (32~131°F)
- 6 **Operating Humidity :** 0~95% (non condensing)
- 7 **Weight :** 0.6kg ($\pm 1\%$)
- 8 **Dimensions :** Armature - (Φ)55x(T)8mm
Magnet - (Hori)250mm, (Verti)220mm

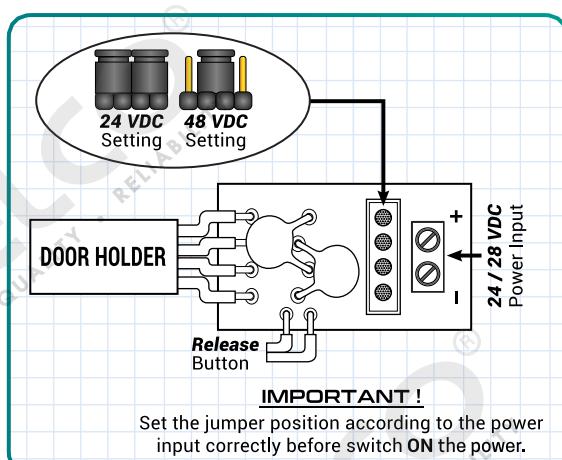

EBELCO electromagnetic door holders are known with its excellent reliability in fail-safe operation and the remarkable features.

The series compliance to **CE** and are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with the maximum quality and reliability.

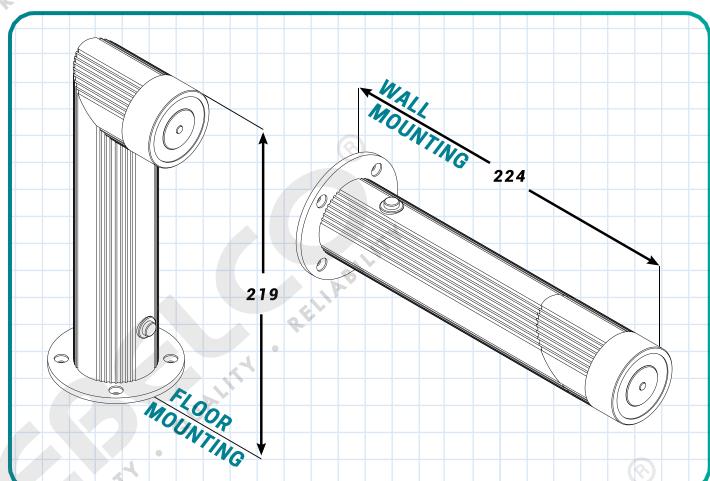

*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.



SECURITY . QUALITY . RELIABILITY

EBELCO INDUSTRIES SDN. BHD. 474704-V

16, Jalan TTC 26, Taman Teknologi Cheng,
75250, Melaka, Malaysia.

Phone : [+606] 333 8855 Fax : [+606] 333 8822
Email : www.ebelco.com enquiry@ebelco.com

WWW.EBELCO.COM