



SS1200

© EBELCO COPYRIGHT 2019.

FEATURES :



- ✓ All Parts Sealed For Water-Resistance
- ✓ Single Side Installation Design
- ✓ Heavy Duty Stainless Steel Case For Vandal-Resistance & Anti-Corrosion Purpose
- ✓ Dual Voltage Selectable (12 VDC / 24 VDC)
- ✓ Low Current Consumption
- ✓ Hall Effect Reed Monitoring Lock Status
- ✓ Reliable Holding Force
- ✓ Durable & Silence Operation
- ✓ Anti Residual Magnetism Kick Off Button

SPECIFICATIONS :

- 1 Voltage Input : 12 VDC / 24 VDC
- 2 Current Draw : 12V / 420mA ; 24V / 210mA (±5%)
- 3 Holding Force : Up to 1200 lbs (545 kg)
- 4 Hall Effect Contact : 40VDC, 0.25A, 10W
- 5 Anti-Rust Surface Treatment : Blue Zinc Plating
- 6 Operating Temperature : 0~55° C (32~131° F)
- 7 Operating Humidity : 0~95% (non condensing)
- 8 Weight : 4.72 kg (±1%)
- 9 Dimensions : Magnet - (L)222x(W)62x(T)42 mm
Armature - (L)185x(W)61x(T)16.5 mm

EBELCO Stainless Steel 1200 series electromagnetic locks are known with its water-proof construction for all weathers used and the heavy duty with its excellent holding force.

The series are compliance to CE and manufactured under the highest quality control to achieve the commitment to customer who always satisfied with the maximum quality and reliability.

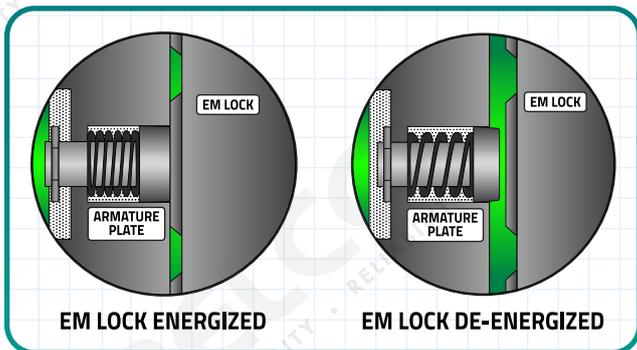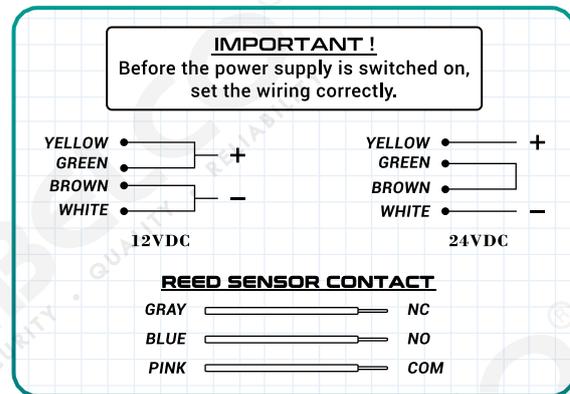

*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

CE RoHS

